



## 100% process safe standard solution against tool pull out

### PROCESS SECURITY

No tool pull out and thus no costly rework or even damages to the workpieces


### STANDARD

Form-fitting clamping of standard tools with endmill flat for the advanced machining with complete security


### secuRgrip®

The threaded insert is designed to fit in every endmill flat – 100% security with a nut


Available for **powRgrip®** and **ER**



secuRgrip® is available for all standard tools with endmill flat, without additional modifications




Excellent vibration dampening



Increased productivity through security of process

## Avoid tool pull out

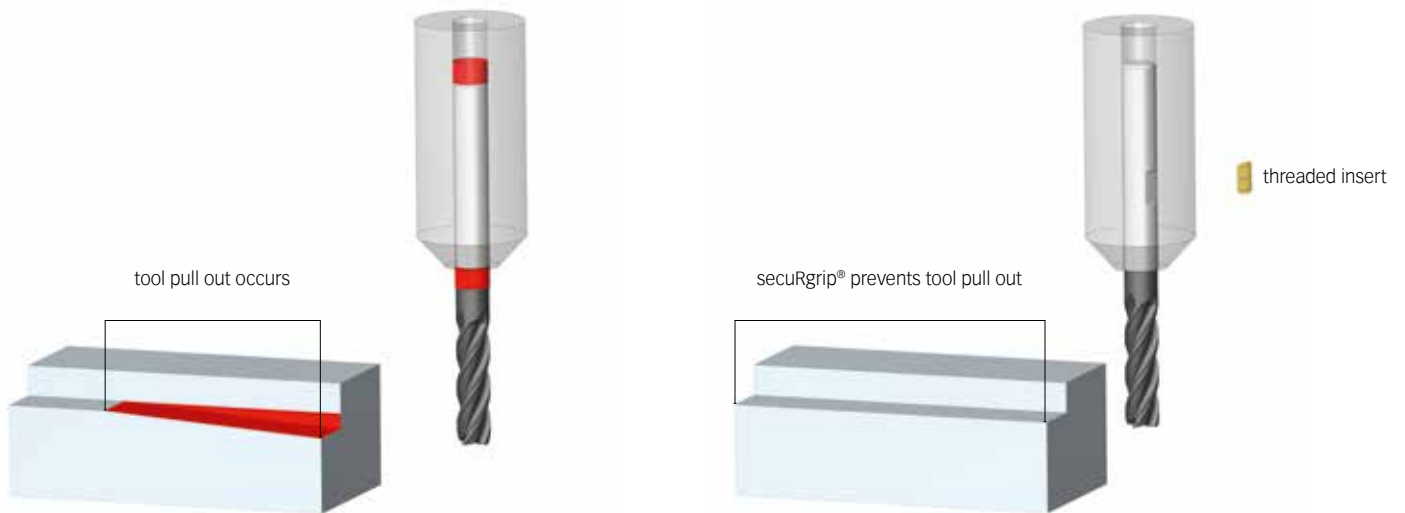

Changes in length can cause damages to the workpiece

Workpiece damages are impossible thanks to REGO-FIX secuRgrip®

## Product overview



### secuRgrip® for powRgrip®

Collets PG 15-SG, PG 25-SG and PG 32-SG  
For shank diameter 10 – 25.4 mm (h6 tolerance)

Every standard PG toolholder for PG 15 to PG 32 can be produced/modified to PG-SG toolholder.

The PG toolholder head has a thread and the secuRgrip safety nut secures the PG-SG collet in the toolholder.

### secuRgrip® for ER Systems

Collets ER 32-SG and ER 40-SG  
For shank diameter 10 – 25.4 mm (h6 tolerance)

The change from ER collet to an ER-SG collet makes every REGO-FIX ER toolholder to an ER-SG toolholder. No modifications on the toolholder are required.

## REGO-FIX AG

Obermattweg 60 / 4456 Tenniken / Switzerland

[www.rego-fix.com](http://www.rego-fix.com)

Your REGO-FIX Partner